

CW-PROFIL 75x50x0,6mm

Anwendungstechnische Daten: Artikelnummer/Länge


8055730619949	2500 mm	8055730620044	4750 mm
8055730619956	2600 mm	8055730620051	5000 mm
8055730619963	2750 mm	8055730620068	5250 mm
8055730619970	3000 mm	8055730620075	5500 mm
8055730619987	3250 mm	8055730620082	5750 mm
8055730619994	3500 mm	8055730620099	6000 mm
8055730620006	3750 mm	8055730620105	6500 mm
8055730620013	4000 mm	8055730620112	7000 mm
8055730620020	4250 mm	8055730620129	7500 mm
8055730620037	4500 mm	8055730620136	8000 mm

Anwendungsbereich:	Aufbau für Ständerwände
Norm:	DIN EN14195 und DIN 18182 Teil 1
Material:	Verzinktes Stahlblech der Sorte DX51D nach DIN EN 10327 Nach den Toleranzen UNI EN 10143
Biegesteifigkeit:	Fliessgrenze > 280 N/mm ²
Feuerschutzklasse:	Euroklasse A1
Gewicht:	0,780 kg/m



bauline

CW-PROFIL 75x50x0,6mm

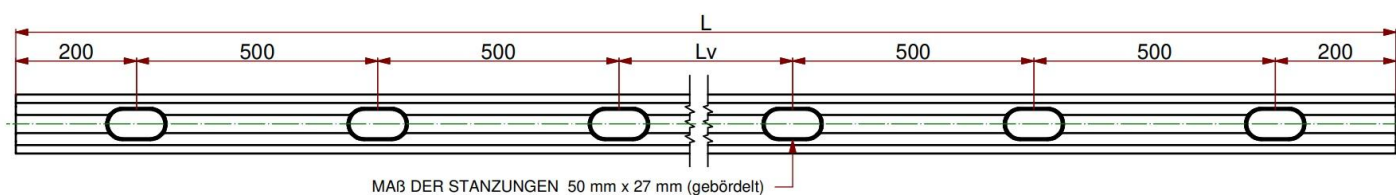

Artikel	Anzahl Löcher
Länge Profil ≤ 2399mm	4
Länge Profil ≤ 2899mm	5
Länge Profil > 2900mm	6

