


## CW-PROFIL 125x50x0,6mm

### Anwendungstechnische Daten: Artikelnummer/Länge


|               |         |               |         |
|---------------|---------|---------------|---------|
| 8055730620341 | 2600 mm | 8055730620440 | 6000 mm |
| 8055730620358 | 2750 mm |               |         |
| 8055730620365 | 3000 mm |               |         |
| 8055730620372 | 3250 mm |               |         |
| 8055730620389 | 3500 mm |               |         |
| 8055730620396 | 3750 mm |               |         |
| 8055730620402 | 4000 mm |               |         |
| 8055730620419 | 4250 mm |               |         |
| 8055730620426 | 4500 mm |               |         |
| 8055730620433 | 5000 mm |               |         |

|                    |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| Anwendungsbereich: | Aufbau für Ständerwände                                                                     |
| Norm:              | DIN EN14195 und DIN 18182 Teil 1                                                            |
| Material:          | Verzinktes Stahlblech der Sorte DX51D nach DIN EN 10327<br>Nach den Toleranzen UNI EN 10143 |
| Biegesteifigkeit:  | Fliessgrenze > 280 N/mm <sup>2</sup>                                                        |
| Feuerschutzklasse: | Euroklasse A1                                                                               |
| Gewicht:           | 0,995 kg/m                                                                                  |

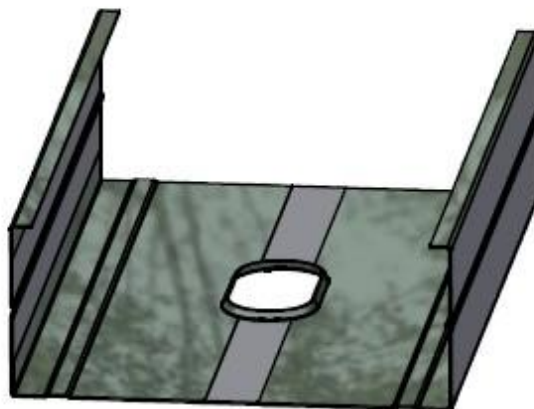

# bauline

## CW-PROFIL 125x50x0,6mm

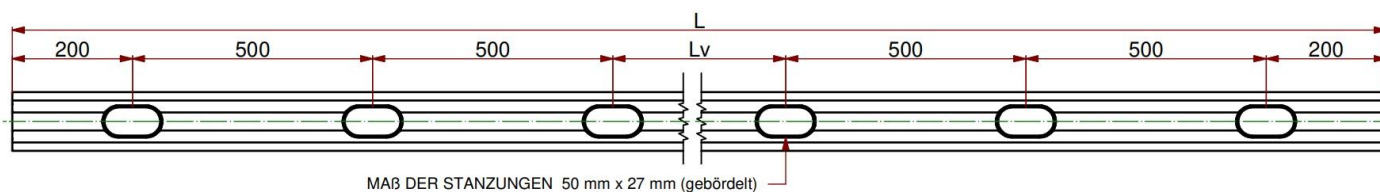

### Anzahl der Löcher pro Stück

| Artikel               | Anzahl Löcher |
|-----------------------|---------------|
| Länge Profil ≤ 2399mm | 4             |
| Länge Profil ≤ 2899mm | 5             |
| Länge Profil > 2900mm | 6             |

