

UA-PROFIL 50x50x0,6mm

Anwendungstechnische Daten: Artikelnummer/Länge



8055730621027	2500 mm	8055730621126	4750 mm
8055730621034	2600 mm	8055730621133	5000 mm
8055730621041	2750 mm	8055730621140	5250 mm
8055730621058	3000 mm	8055730621157	5500 mm
8055730621065	3250 mm	8055730621164	5750 mm
8055730621072	3500 mm	8055730621171	6000 mm
8055730621089	3750 mm	8055730621188	6500 mm
8055730621096	4000 mm	8055730621195	7000 mm
8055730621102	4250 mm	8055730621201	7500 mm
8055730621119	4500 mm	8055730621218	8000 mm

Anwendungsbereich:	Aufbau für Ständerwände
Norm:	DIN EN14195 und DIN 18182 Teil 1
Material:	Verzinktes Stahlblech der Sorte DX51D nach DIN EN 10327 Nach den Toleranzen UNI EN 10143
Biegesteifigkeit:	Fliessgrenze > 280 N/mm ²
Feuerschutzklasse:	Euroklasse A1
Gewicht:	1,808 kg/m



bau//ne

UA-PROFIL 50x50x0,6mm

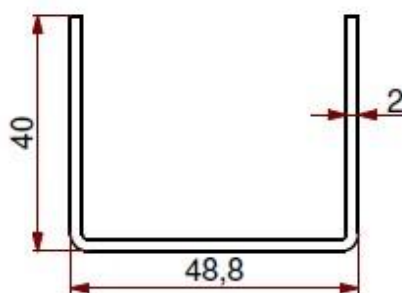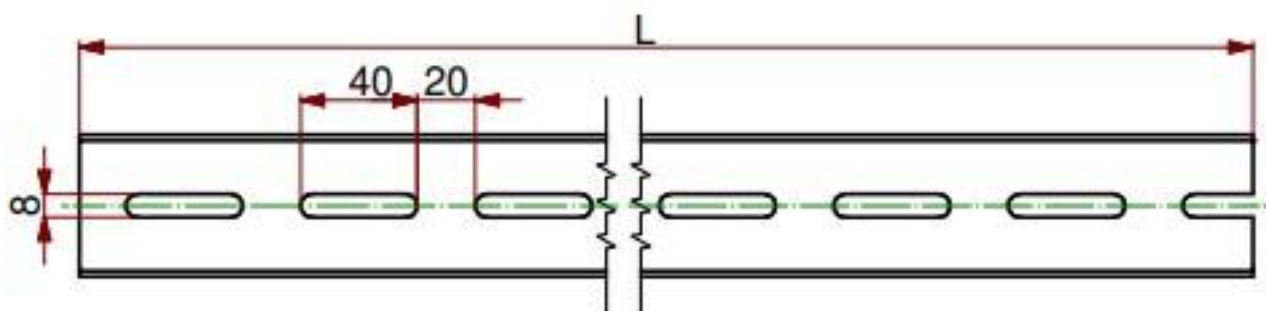

Hersteller:
Cipriani Profilati SB C.s.r.l., 38068 Rovereto
Tel.: +39 0464 020 346, Fax: +39 0464 020 385

Stand: 13.02.2026

