

UA-PROFIL 75x40x2mm

Anwendungstechnische Daten: Artikelnummer/Länge



8055730621225	2500 mm	8055730621324	4750 mm
8055730621232	2600 mm	8055730621331	5000 mm
8055730621249	2750 mm	8055730621348	5250 mm
8055730621256	3000 mm	8055730621355	5500 mm
8055730621263	3250 mm	8055730621362	5750 mm
8055730621270	3500 mm	8055730621379	6000 mm
8055730621287	3750 mm	8055730621386	6500 mm
8055730621294	4000 mm	8055730621393	7000 mm
8055730621300	4250 mm	8055730621409	7500 mm
8055730621317	4500 mm	8055730621416	8000 mm

Anwendungsbereich:	Aufbau für Ständerwände
Norm:	DIN EN14195 und DIN 18182 Teil 1
Material:	Verzinktes Stahlblech der Sorte DX51D nach DIN EN 10327 Nach den Toleranzen UNI EN 10143
Biegesteifigkeit:	Fliessgrenze > 280 N/mm ²
Feuerschutzklasse:	Euroklasse A1
Gewicht:	2,178 kg/m



bau//ne

UA-PROFIL 75x40x2mm

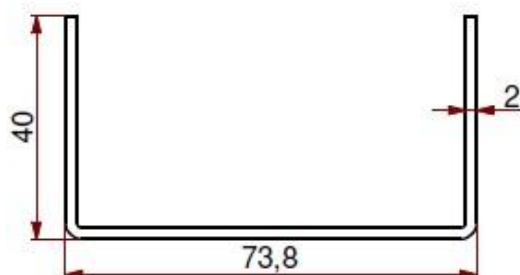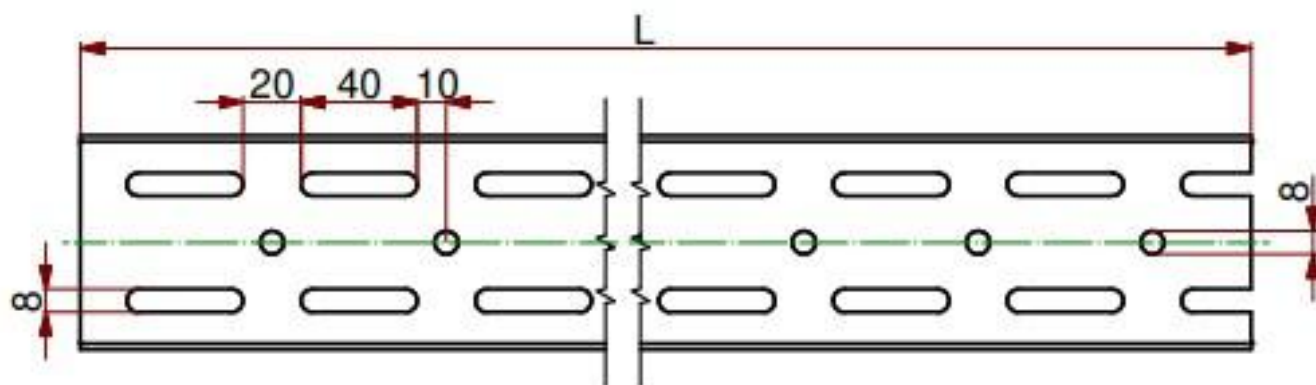

Hersteller:
Cipriani Profilati SB C s.r.l., 38068 Rovereto
Tel.: +39 0464 020 346, Fax: +39 0464 020 385

Stand: 13.02.2026

