


UA-PROFIL 100x40x2mm

Anwendungstechnische Daten: Artikelnummer/Länge



8055730621423	2500 mm	8055730621522	4750 mm
8055730621430	2600 mm	8055730621539	5000 mm
8055730621447	2750 mm	8055730621546	5250 mm
8055730621454	3000 mm	8055730621553	5500 mm
8055730621461	3250 mm	8055730621560	5750 mm
8055730621478	3500 mm	8055730621577	6000 mm
8055730621485	3750 mm	8055730621584	6500 mm
8055730621492	4000 mm	8055730621591	7000 mm
8055730621508	4250 mm	8055730621607	7500 mm
8055730621515	4500 mm	8055730621614	8000 mm

Anwendungsbereich:	Aufbau für Ständerwände
Norm:	DIN EN14195 und DIN 18182 Teil 1
Material:	Verzinktes Stahlblech der Sorte DX51D nach DIN EN 10327 Nach den Toleranzen UNI EN 10143
Biegesteifigkeit:	Fliessgrenze > 280 N/mm ²
Feuerschutzklasse:	Euroklasse A1
Gewicht:	2,550 kg/m

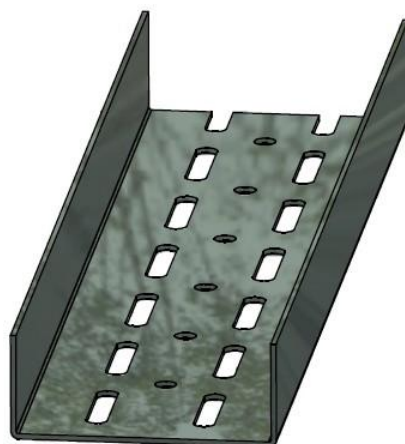

bau//ne

UA-PROFIL 100x40x2mm

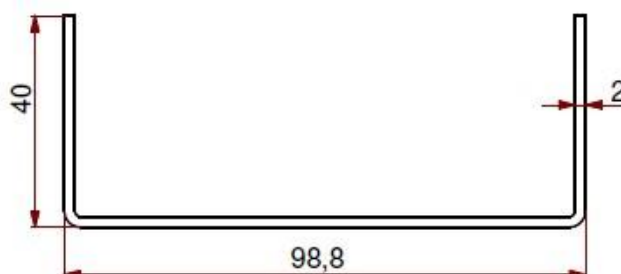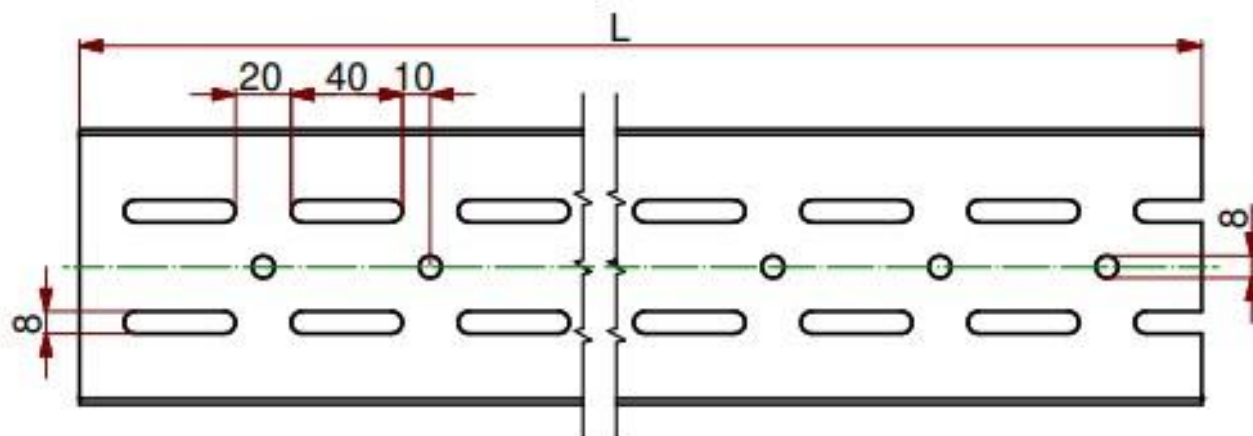

Hersteller:
Cipriani Profilati SB C s.r.l., 38068 Rovereto
Tel.: +39 0464 020 346, Fax: +39 0464 020 385

Stand: 13.02.2026

